





# C-1 MAX

203




Luce racchiusa in un cubetto di cartongesso che può svelarsi e uscire dal soffitto oppure restare celato. C-1 max è il faretto Cartoon light capace di adattarsi a tante situazioni diverse grazie alla sua varietà di installazioni e tipologie di sorgente.

Light enclosed in a plasterboard cube that can protract from the ceiling or remain concealed. C-1 MAX is the Cartoon light spotlight that can adapt to various situations thanks to variety of installations and source types.

## C-1 MAX

- VERSIONE CON SORGENTE LED INTEGRATA DIMMERABILE TRIAC, FASCI 25°/40° (INCASSO O SEMINCASSO)
- VERSIONE CON SORGENTE LED INTEGRATA DIMMERABILE TRIAC, VETRO DIFFUSORE OPALE (INCASSO O SEMINCASSO)
- VERSIONE A TENSIONE DI RETE CON SORGENTE LED GU10 (PLAFONE, INCASSO O SEMINCASSO)

- VERSION WITH DIMMABLE TRIAC INTEGRATED LED SOURCE, 25 ° / 40 ° BEAMS (RECESSED OR SEMI RECESSED )
- VERSION WITH DIMMABLE INTEGRATED LED SOURCE TRIAC, OPAL DIFFUSER GLASS (RECESSED OR SEMI RECESSED )
- STANDARD VOLTAGE VERSION WITH LED GU10 SOURCE (CEILING, RECESSED OR SEMI-RECESSED)

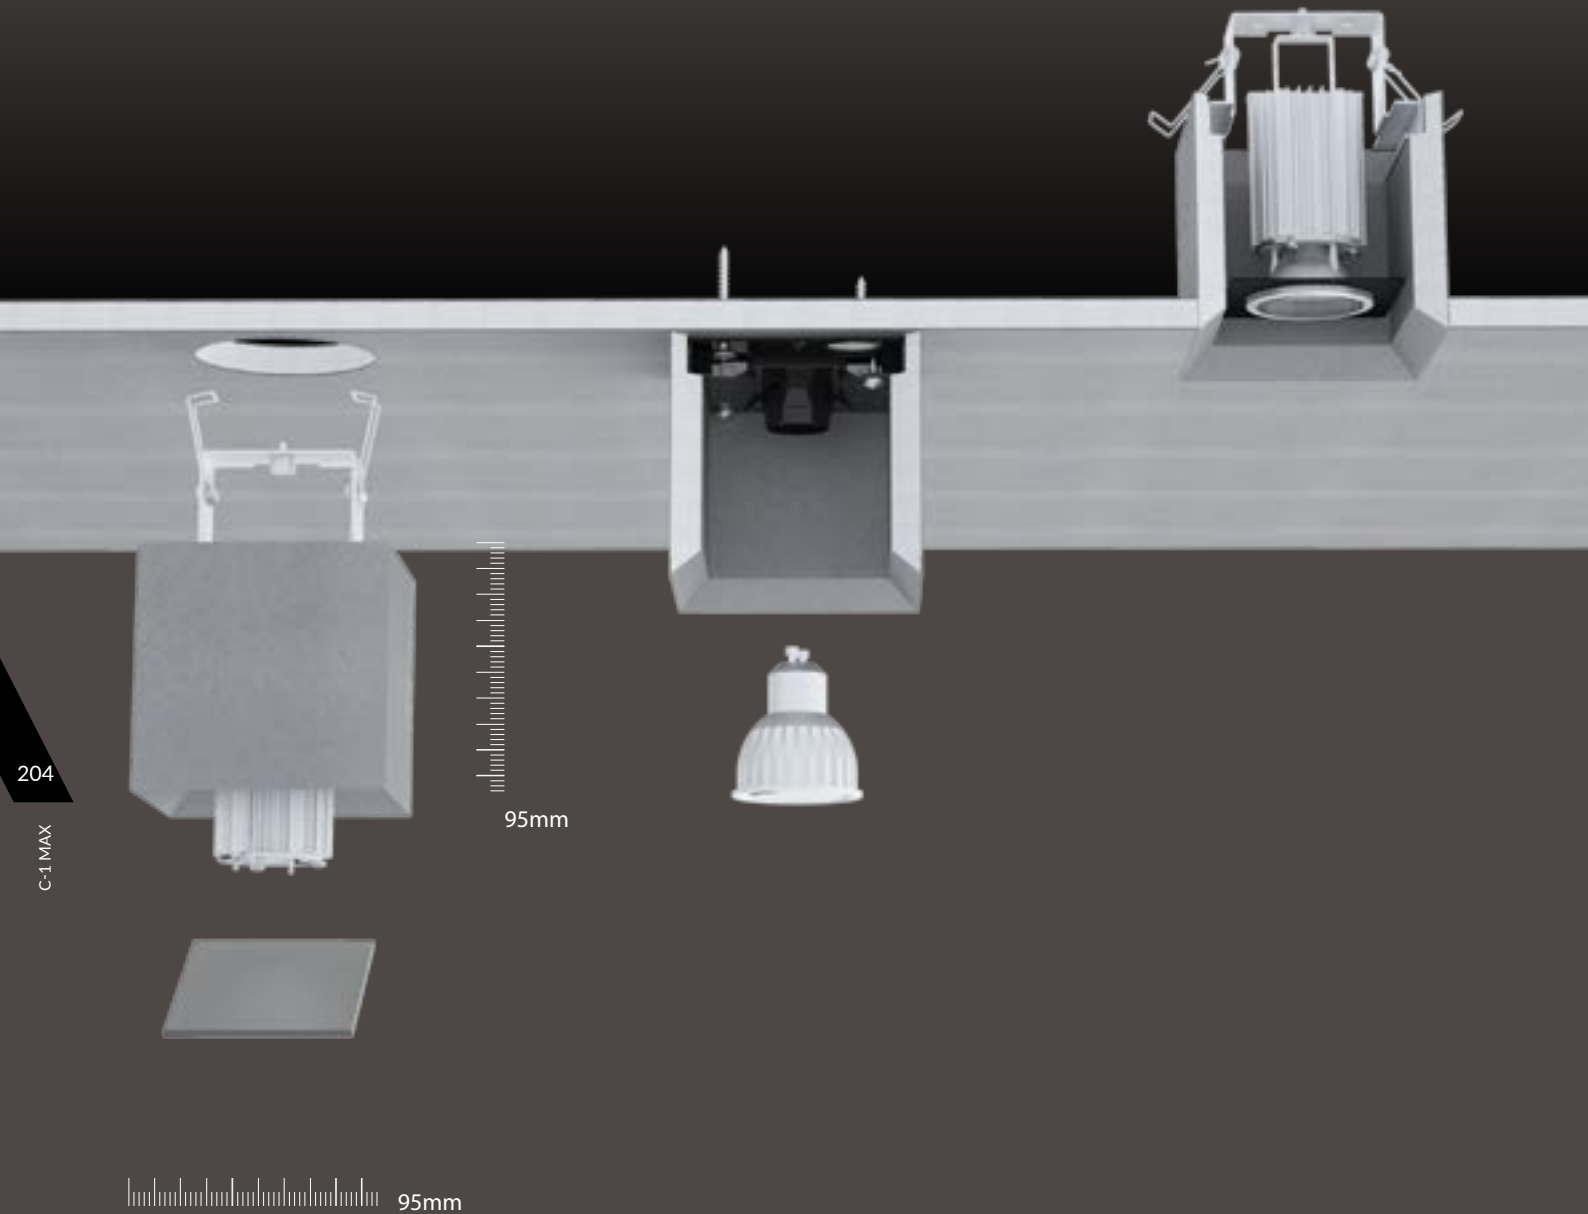



**C-1 MAX downlight LED**

in cartongesso. Sorgente LED e alimentazione elettronica 220-240V 50/60Hz incluse. Dimmerabile TRIAC

**C-1 MAX downlight LED**




made of plasterboard. LED source and electronic driver 220-240V 50/60Hz included. TRIAC dimmable

**3000K**

Codice/Code	W led	fascio/beam	Flusso apparecchio/Fixture flux (lm)
<b>101809.99</b>	10,5	25°	1145
<b>101811.99</b>	10,5	40°	1155

**4000K**

Codice/Code	W led	fascio/beam	Flusso apparecchio/Fixture flux (lm)
<b>101810.99</b>	10,5	25°	1180
<b>101812.99</b>	10,5	40°	1180

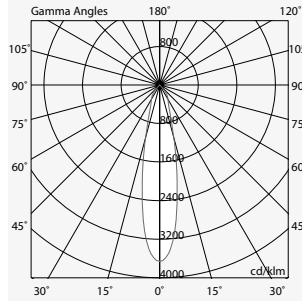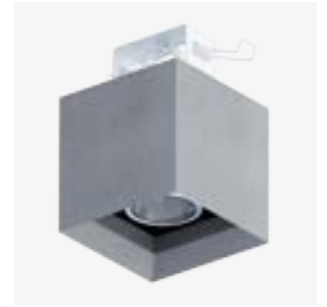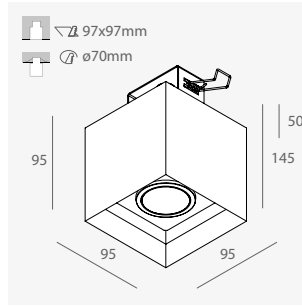



**C-1 MAX downlight LED GU10**

in cartongesso. A tensione di rete, sorgente (H=55 mm) non inclusa

**C-1 MAX downlight LED GU10**

made of plasterboard. Standard voltage, lamp (H=55 mm) not included

Codice/Code	W led	
<b>101859.99</b>	8 max	GU10

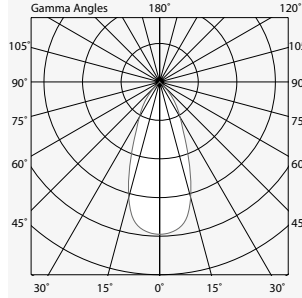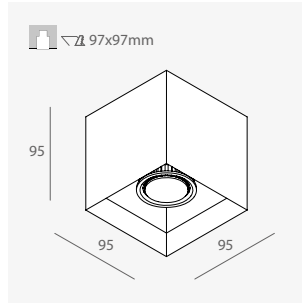

**C-1 MAX downlight LED emissione diffusa**

in cartongesso. Schermo in vetro sabbato temprato. Sorgente LED e alimentazione elettronica 220-240V 50/60Hz incluse

**C-1 MAX downlight LED diffused emission**

made of plasterboard. Tempered sand blasted glass screen. LED source and electronic driver 220-240V 50/60Hz included

**3000K**

Codice/Code	W led	Flusso apparecchio/Fixture flux (lm)
<b>101813.99</b>	10,5	852

**4000K**

Codice/Code	W led	Flusso apparecchio/Fixture flux (lm)
<b>101814.99</b>	10,5	859

