

CREP

NEW

- Crep Tondo Ø=300mm
- Crep Quadrato L=300mm



Apparecchio LED per installazione a plafone o ad incasso in battuta in controsoffitto. Temperatura di colore delle sorgenti selezionabile con selettore sul retro dell'apparecchio in 3000K, 4000K o 5400K. Disponibile in due dimensioni, potenza totale settabile tra tre disponibili. Corpo in policarbonato e schermo diffusore in polistirene opale. Staffa di installazione in acciaio. Molle in acciaio armonico per fissaggio su controsoffitto di spessore fino a 15 mm, che permettono la regolazione in funzione della dimensione del foro da incasso disponibile. Alimentazione elettronica inclusa, integrata nel corpo dell'apparecchio.


LED fixture for ceiling or recessed installation in false ceiling. Source color temperature, selectable with selector on the back of the fixture in 3000K, 4000K or 5400K. Two sizes are available, total power adjustable between three available. Polycarbonate body and diffuser screen in opal polystyrene. Steel installation bracket. Springs in harmonic steel for fastening to false ceiling thickness up to 15 mm, which allow adjustment according to the size of the recessed hole available. Electronic power supply included, integrated in the body of the fixture.



25
16/20

CREP TONDO

CREP ROUND



Ø

10/13/16 W	16/20/22 W
H 100	H 100
Ø 65-205	Ø 65-254

POWER variable*	Ø (mm)	H (mm)	FLUX
10W / 13W / 16W	235	16	variable* 107501.01
16W / 20W / 22W	300	20	variable* 107503.01


* Temperatura di colore delle sorgenti, selezionabile con selettore	Crep Ø235mm			Crep Ø300mm			
	LED colour	FLUX / POWER			LED colour	FLUX / POWER	
Source color temperature, selectable with selector		10W	13W	16W		16W	20W 22W
	3000K	1094 / 1387 / 1642 lm			3000K	1682 / 2015 / 2191 lm	
	4000K	1173 / 1516 / 1826 lm			4000K	1896 / 2252 / 2483 lm	
	5400K	1134 / 1447 / 1696 lm			5400K	1749 / 2093 / 2280 lm	



25
16/20

CREP QUADRATO

CREP SQUARE




L

10/13/16 W	16/20/22 W
H 100	H 100
Ø 65-205	Ø 65-254

POWER variable*	L (mm)	H (mm)	FLUX
10W / 13W / 16W	235	16	variable* 107502.01
16W / 20W / 22W	300	20	variable* 107504.01

* Temperatura di colore delle sorgenti, selezionabile con selettore	Crep L.235mm			Crep L.300mm			
	LED colour	FLUX / POWER			LED colour	FLUX / POWER	
Source color temperature, selectable with selector		10W	13W	16W		16W	20W 22W
	3000K	1094 / 1387 / 1642 lm			3000K	1709 / 2061 / 2233 lm	
	4000K	1173 / 1516 / 1826 lm			4000K	1850 / 2260 / 2470 lm	
	5400K	1134 / 1447 / 1696 lm			5400K	1800 / 2163 / 2325 lm	

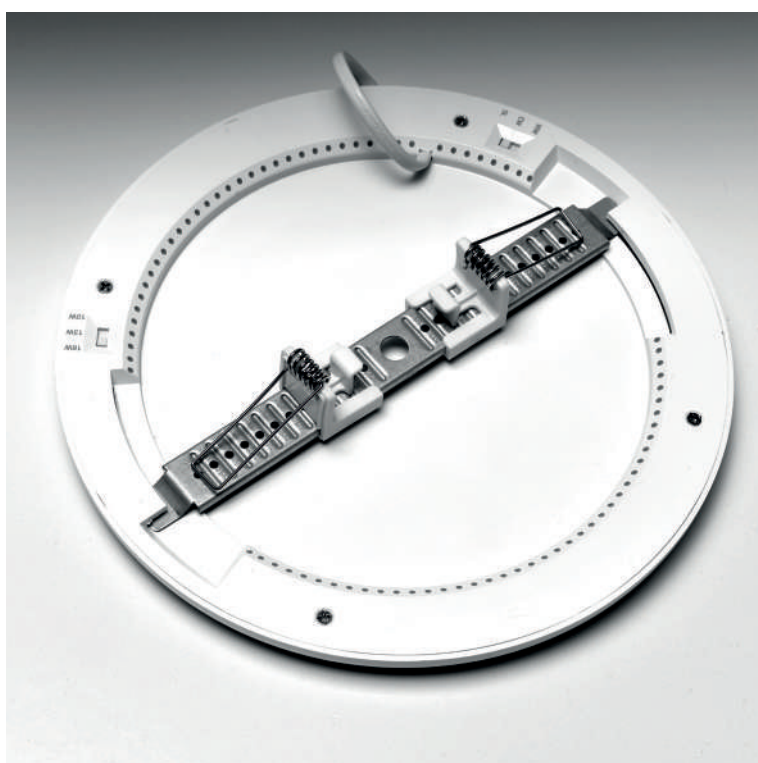


Selettore temperatura di colore delle sorgenti
3000K, 4000K o 5400K.

Color temperature selector
3000K, 4000K, or 5400K.



Selettore potenza totale
10W, 13W o 16W.
16W, 20W o 22W.

Total power selector
10W, 13W or 16W.
16W, 20W or 22W.



Molle regolabili per installazione a controsfitto, rimovibili per installazione a plafone.

Adjustable springs for ceiling installation, removable for ceiling installation.