

HALOS B




Profilo LED circolare per installazione a sospensione ad emissione di luce diretta-indiretta, con doppia accensione.

Corpo in estruso di alluminio e rosoni in acciaio verniciati a polvere, schermi diffusori in PMMA opale. Disponibili rosoni con alimentazione integrata per cavi di sospensione convergenti o paralleli, oppure rosoni per alimentazione remota. Alimentazione elettronica 220-240V 50/60Hz disponibile anche DALI/PUSH.

Circular LED profile for suspension installation with direct-indirect light output, with double switch.

Extruded aluminum body and powder-coated steel canopy, opal PMMA diffuser screens. Canopies with integrated driver are available for converging or parallel suspension cables, or rosettes for remote power supply. Electronic power supply 220-240V 50/60hz also available DALI/PUSH.




HALOS B 962

n°4 cavi di sospensione
L=3000 mm e cavo di
alimentazione (4x0,5 mmq)
con guaina in tinta, inclusi.
Rosone per alimentazione remota
o integrata da ordinare a parte.

n°4 suspension cables
L=3000 mm and power cable
(4x0,5 mmq) with matching
sheath, included.
Canopy for remote or integrated
power supply to be ordered
separately.

Ø (mm)	POWER	FLUX	3000K	FLUX	4000K
962	92W	7384 lm	<input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/>
			107101.01	.02	7751 lm 107102.01 .02



HALOS B 1440

n°4 cavi di sospensione
L=3000 mm e cavo di
alimentazione (4x0,5 mmq)
con guaina in tinta, inclusi.
Rosone per alimentazione remota
o integrata da ordinare a parte.

n°4 suspension cables
L=3000 mm and power cable
(4x0,5 mmq) with matching
sheath, included.
Canopy for remote or integrated
power supply to be ordered
separately.

Ø (mm)	POWER	FLUX	3000K	FLUX	4000K
1440	138W	11037 lm	<input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/>
			107103.01	.02	11589 lm 107104.01 .02

HALOS B

ACCESSORI PER INSTALLAZIONE CON ALIMENTAZIONE REMOTA ACCESSORIES FOR REMOTE DRIVER MOUNTING




ROSONE PER INSTALLAZIONE SINGOLA
n°1 kit di alimentazione da ordinare a parte.

CANOPY FOR SINGLE INSTALLATION
n°1 power supply kit to be ordered separately.

CODE

107113.01 .02




ROSONE PER INSTALLAZIONE DOPPIA
n°2 kit di alimentazione da ordinare a parte.

CANOPY FOR DOUBLE INSTALLATION
n°2 power supply kits to be ordered separately.

CODE

107114.01 .02

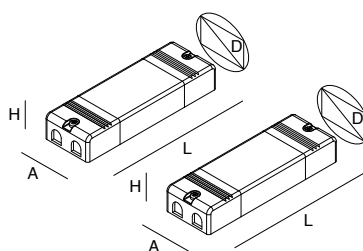

KIT DI ALIMENTAZIONE
composto da n°2 alimentatori elettronici
220-240V 50/60 Hz,
per luce diretta e indiretta.

POWER SUPPLY KIT
composed of n°2 electronic drivers
220-240V 50/60 Hz,
for direct and indirect light.

CODE VERSION D (mm) A (mm) H (mm) L (mm)

107105.99 962 mm 91 85 31 220

107109.99 1440 mm 105 100 31 235


DALI-PUSH

CODE VERSION D (mm) A (mm) H (mm) L (mm)

107106.99 962 mm 91 85 31 220

107110.99 1440 mm 105 100 31 235

ACCESSORI PER INSTALLAZIONE CON ALIMENTAZIONE INTEGRATA ACCESSORIES FOR INTEGRATED DRIVER MOUNTING



ROSONE ALIMENTATO
PER CAVI CONVERGENTI
composto da n°2 alimentatori elettronici
220-240V 50/60 Hz,
per luce diretta e indiretta.
Idoneo per sola installazione singola.
Prevista accensione unica per gestione PUSH.

FEED CANOPY
FOR CONVERGING CABLES
composed of n°2 electronic drivers
220-240V 50/60 Hz,
for direct and indirect light.
Suitable for single installation only.
Single switch for PUSH management.

CODE VERSION

107107.01 .02 962 mm


107111.01 .02 1440 mm

DALI-PUSH

CODE VERSION

107108.01 .02 962 mm

107112.01 .02 1440 mm



ROSONE ALIMENTATO
PER CAVI PARALLELI
composto da n°2 alimentatori elettronici
220-240V 50/60 Hz,
per luce diretta e indiretta.
Idoneo per sola installazione singola.
Prevista accensione unica per gestione PUSH.

FEED CANOPY
FOR PARALLEL CABLES
composed of n°2 electronic drivers
220-240V 50/60 Hz,
for direct and indirect light.
Suitable for single installation only.
Single switch for PUSH management.

CODE VERSION

107115.01 .02 962 mm

107117.01 .02 1440 mm

DALI-PUSH

CODE VERSION

107116.01 .02 962 mm

107118.01 .02 1440 mm