

GROUND PRO



Apparecchio a LED IP67, calpestabile fino a 1000kg di carico statico. Idoneo anche per installazione a parete in muratura. Sorgenti LED warm white 3000K o neutral white 4000K. Emissione spot o medium.

Materiali

Corpo in lega di alluminio anodizzata, ghiera in lega di alluminio anodizzata e verniciata a polvere o in acciaio inox AISI 316L spazzolato; schermo piano in vetro temprato extrachiaro trasparente; lente in PMMA ottico; cassaforma in polietilene da ordinare a parte (accessorio obbligatorio).

Cablaggi

Fornito di pressacavo in ottone nichelato e membrana idrofobica in GORE-TEX e di cavi di alimentazione H05RN-F 2x1mm² di L=500mm. Alimentazione separata, con alimentatore elettronico stabilizzato 24Vdc 220-240V 50/60Hz.

LED IP67 fixture, drive-over MAX 1000kg of static load. Suitable also for recessed installation in concrete wall.



LED sources warm white 3000K or neutral white 4000K. Spot or medium emission.

Materials

Body made of anodized aluminium alloy, ring made of anodized powder coated aluminium alloy, or ring made of brushed AISI 316L stainless steel; flat screen made of transparent extra-clear tempered glass; lens made of optical PMMA; housing box made of polyethylene to be ordered separately (compulsory accessory).

Wiring

Complete with cord grip made of nickel-plated brass and hydrophobic membrane GORE-TEX and with H05RN-F 2x1mm² L=500mm power supply cables. Separated electronic stabilized driver 24Vdc 220-240V 50/60Hz.

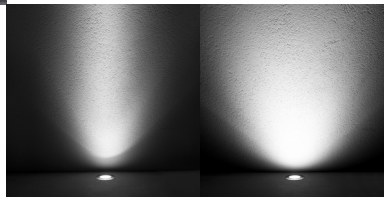

58


Ground PRO LED ghiera in lega di alluminio verniciata oppure in acciaio inox AISI 316L, cassaforma in polietilene ed alimentatore elettronico 24V da ordinare a parte
Ground PRO LED ring made of painted aluminium alloy or AISI 316L stainless steel, housing box made of polyethylene and 24V electronic driver to be ordered separately

3000K

Codice/Code	W led	Fascio/Beam	lm
15505.03	6	20°	527
15505.06	6	20°	527
15505.09	6	20°	527
15506.03	6	60°	514
15506.06	6	60°	514
15506.09	6	60°	514


4000K

Codice/Code	W led	Fascio/Beam	lm
15507.03	6	20°	556
15507.06	6	20°	556
15507.09	6	20°	556
15508.03	6	60°	542
15508.06	6	60°	542
15508.09	6	60°	542



ACCESSORI/ACCESSORIES

Cassaforma in polietilene
 accessorio obbligatorio per l'installazione
Housing Box made of polyethylene
 compulsory accessory




Codice/Code

15509.99



Alimentatore elettronico stabilizzato 24 Vdc
 220-240V 50/60Hz
Electronic stabilized driver
 24 Vdc 220-240V 50/60Hz



Codice/Code

IP	W	A (mm)	D (mm)	H (mm)	L (mm)	
101301.99	20	45	30	34	16	251
101302.99	20	100	30	35	18	320
E182K0060KK	67	60	43	54	32	163
E182K0100KK	67	100	52	64	37	190

