


P-30 READY QUADRATO

Apparecchio LED quadrato per installazione a sospensione, incasso o plafone.
 Profilo in lega di alluminio verniciata a polvere, schermo diffusore opale in policarbonato.
 Alimentatore elettronico incluso.

LED square fixture for suspended, recessed or ceiling mounting.
 Profile made of powder coated aluminium alloy, opal diffuser screen in polycarbonate.
 Electronic driver included.

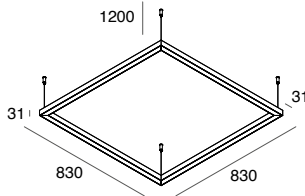

P-30 READY QUADRATO

SOSPENSIONE


Cavi di sospensione L 1200 mm inclusi
 Kit di alimentazione da ordinare a parte

P-30 READY SQUARE

SUSPENSION

Suspension cables L 1200 mm included
 Power supply kit to be ordered separately

L (mm)	POWER	FLUX (white - black)	3000K	FLUX (white - black)	4000K
830x830	32W	4008-3152 lm	<input type="checkbox"/> <input checked="" type="checkbox"/>	103335.01	.02
				4240-3336 lm	103336.01
					.02

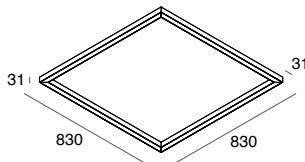


P-30 READY QUADRATO

PLAFONE

P-30 READY SQUARE

CEILING MOUNTED

L (mm)	POWER	FLUX (white - black)	3000K	FLUX (white - black)	4000K
830x830	32W	4008-3152 lm	<input type="checkbox"/> <input checked="" type="checkbox"/>	103337.01	.02
				4240-3336 lm	103338.01
					.02

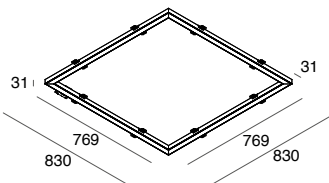

H 110
 L 832
 W 832

P-30 READY QUADRATO

INCASSO

per cartongesso di spessore 12,5 mm

P-30 READY SQUARE

RECESSED MOUNTED


for 12,5 mm plasterboard

L (mm)	POWER	FLUX (white)	3000K	FLUX (white)	4000K
830x830	32W	3456 lm	<input type="checkbox"/> <input checked="" type="checkbox"/>	103351.01	
				3668 lm	103352.01

P-30 READY RETTANGOLARE

Apparecchio LED rettangolare per installazione a sospensione o plafone.
Profilo in lega di alluminio verniciata a polvere, schermo diffusore opale in policarbonato.
Alimentatore elettronico incluso.

LED rectangular fixture for suspended or ceiling mounting.
Profile made of powder coated aluminium alloy, opal diffuser screen in polycarbonate.
Electronic driver included.

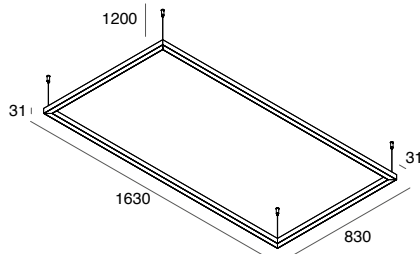

P-30 READY RETTANGOLARE

SOSPENSIONE


Cavi di sospensione L 1200 mm inclusi
Kit di alimentazione da ordinare a parte

P-30 READY RECTANGULAR

SUSPENSION

Suspension cables L 1200 mm included
Power supply kit to be ordered separately

L (mm)	POWER	FLUX (white - black)	3000K	FLUX (white - black)	4000K
1630x830	48W	6012-4728 lm	<input type="checkbox"/> <input checked="" type="checkbox"/>	6360-5004 lm	<input type="checkbox"/> <input checked="" type="checkbox"/>
			103343.01	103344.01	.02

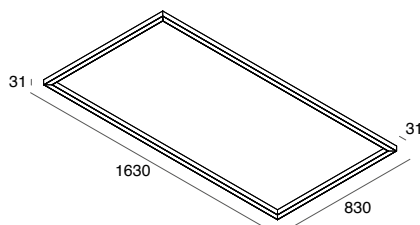

P-30 READY RETTANGOLARE

PLAFONE


P-30 READY RECTANGULAR

CEILING MOUNTED

L (mm)	POWER	FLUX (white - black)	3000K	FLUX (white - black)	4000K
1630x830	48W	6012-4728 lm	<input type="checkbox"/> <input checked="" type="checkbox"/>	6360-5004 lm	<input type="checkbox"/> <input checked="" type="checkbox"/>
			103345.01	103346.01	.02

P-30 READY


ACCESSORI PER INSTALLAZIONE SOSPENSIONE ACCESSORIES FOR SUSPENSION MOUNTED

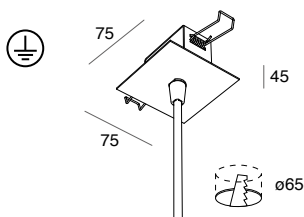

KIT DI ALIMENTAZIONE
PER SOSPENSIONE
rosone ad incasso
in controsoffitto di spessore
da 5 a 15 mm.
Cavo con guaina in tinta,
bianca o nera.

POWER SUPPLY FOR
SUSPENSION
recessed ceiling mounted
canopy for thickness
from 5 up to 15 mm.
Cable with matching sheath,
white or black.

CODE		L (mm)	Cavo / Cable (mm ²)
103319.01	<input type="checkbox"/> <input checked="" type="checkbox"/>	1200	3x0,75

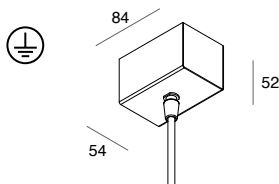

KIT DI ALIMENTAZIONE
PER SOSPENSIONE
rosone a plafone.
Cavo con guaina in tinta,
bianca o nera.

POWER SUPPLY FOR
SUSPENSION
ceiling mounted canopy.
Cable with matching
sheath, white or black.

CODE		L (mm)	Cavo / Cable (mm ²)
103320.01	<input type="checkbox"/> <input checked="" type="checkbox"/>	1200	3x0,75