

SCHOOL

IL PRODOTTO RISPONDEnte AI REQUISITI PER EDIFICI PUBBLICI D.M. 11 OTT 2017 (C.A.M. Edilizia)

THE PRODUCT COMPLIES WITH THE REQUIREMENTS FOR PUBLIC BUILDINGS, MINISTERIAL DECREE OF 11th OCT 2017

** PRODOTTO CERTIFICATO SECONDO G.S.E. D.M. 16 FEB 2016 (Conto termico)


** THE PRODUCT COMPLIES WITH THE REQUIREMENTS OF ENERGY MINISTRY DECREE OF 16th FEB 2016

Pannello LED in lamiera in acciaio verniciata a polvere e lenti in metacrilato. UGR<19 , luminanza <3000cd/m² per angoli >65°
Installabile ad incasso su controsoffitto a pannelli 600x600mm con struttura a vista senza accessori, per le altre installazioni prevedere gli opportuni accessori da ordinare a parte. Alimentatore elettronico incluso.

LED panel made of powder coated steel body and methacrylate lenses. UGR<19, luminance <3000cd/m² for angles >65°. No accessories needed for installation on 600x600mm visible-structure ceiling, accessories for other installations to be ordered separately. Integrated electronic driver.



* Solo versione DALI/PUSH/1-10V




**SCHOOL
600x600**

POWER	FLUX	4000K <input type="checkbox"/>
** 30W	4000 lm	104101.01
20W	2665 lm	104115.01

DALI-PUSH-1-10V

POWER	FLUX	4000K <input type="checkbox"/>
30W	4000 lm	104113.01
20W	2665 lm	104118.01

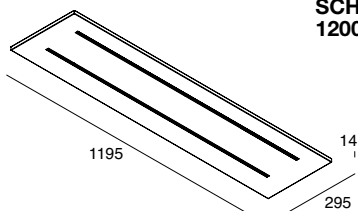



**SCHOOL
1200x300**

POWER	FLUX	4000K <input type="checkbox"/>
** 50W	6832 lm	104104.01
30W	4100 lm	104111.01

DALI-PUSH-1-10V

POWER	FLUX	4000K <input type="checkbox"/>
50W	6832 lm	104114.01
30W	4100 lm	104112.01

ACCESSORI ACCESSORIES





KIT MOLLE PER INSTALLAZIONE AD INCASSO
Per versioni 600x600 e 1200x300, per installazione in battuta in cartongesso di spessore 10±20 mm.

SPRINGS KIT FOR RECESSED INSTALLATION
For 600x600 and 1200x300 versions, for installation by frame contrasting in plasterboard of thickness 10±20 mm.

CODE

104107.99





KIT PER INSTALLAZIONE AD INCASSO A RASAMENTO
Profilo da rasare su cartongesso di spessore 12,5 mm. Il pannello si installa in appoggio.

KIT FOR LEVELLED RECESSED INSTALLATION
Profile to be levelled on 12,5 mm thick plasterboard.


CODE

VERSION (mm)

102028.99	600x600
102029.99	1200x300



SCHOOL

ACCESSORI
ACCESSORIES

KIT ANTICADUTA


Cavo in acciaio da fissare a soffitto o strutture tramite morsetto in ottone nichelato e aggancio a vite sul pannello.

CODE L (mm)

104119.99 3000

ANTI FALL-OUT KIT

Steel cable to be fixed to the ceiling or structures using a nickel-plated brass clamp and screwed on the panel.



KIT PER INSTALLAZIONE A PLAFONE

Altezza totale, compreso apparecchio, 40 mm
Accessorio opzionale per installazione a sospensione.



CODE VERSION

104108.01 600x600

104109.01 1200x300

KIT FOR CEILING MOUNTING

Overall height, including lighting fixture, 40 mm
Optional accessory for suspended mounting.

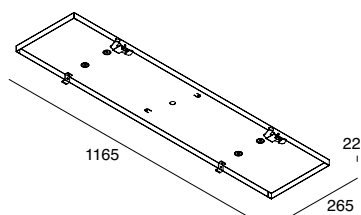


CAVI DI SOSPENSIONE (4pz)
per versioni 600x600 e 1200x300.
Accessorio compatibile con il kit per installazione a plafone.

CODE L (mm)

104110.99 1200

SUSPENSION CABLES (4pcs)

For 600x600 and 1200x300 versions
Suitable for the kit for ceiling mounting


KIT DI ALIMENTAZIONE
PER SOSPENSIONE

POWER SUPPLY KIT
FOR SUSPENSION

CODE L (mm) Cavo / Cable (mm²)

12120.01 1200 3x1,5

12122.01 1200 5x1,5



KIT DI ALIMENTAZIONE IN EMERGENZA

Per versioni 600x600 e 1200x300.
Completo di connettori polarizzati per il collegamento dell'alimentatore
Kit emergenza 3H non idoneo per installazione a plafone.

KIT FOR EMERGENCY

For 600x600 and 1200x300 versions.
Polarized connectors included
3H emergency kit non suitable for ceiling mounting.

CODE TIME A (mm) D (mm) H (mm) L (mm)

102025.99 1h 46 59 23 138

102026.99 3h 80 92 44,5 212

Flusso in emergenza
Emergency flux

SCHOOL 600x600 30W 19%

SCHOOL 600x600 20W 30%

SCHOOL 1200x300 50W 11%

SCHOOL 1200x300 30W 20%